
Hybrid Control...


Continuous Time and Discrete Time Models

Motivation

In this lecture we will introduce the concept of *Hybrid Control*. By this terminology we mean the combination of a *digital control law with a continuous-time system*. We will be particularly interested in analysing the continuous response and the connections with the sampling points.

We recall the motivations and the main design concepts presented in the slides for the previous lectures.

The set-up for digital control of this system is shown schematically below:

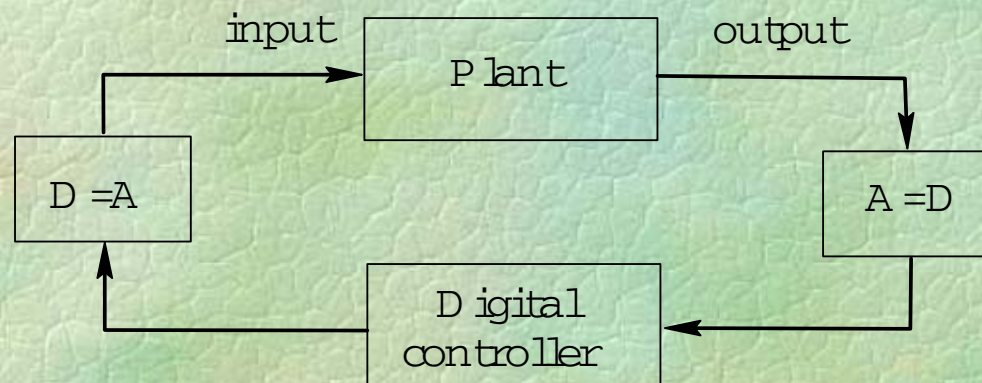

The objective is to cause the output $y(t)$, to follow a given reference signal, $y^*(t)$.

We can note that that the continuous response could contain nasty surprises if certain digital controllers were implemented on continuous systems.

In the previous lectures we analysed and tried to explain:

- ❖ why the continuous response can appear very different from that predicted by the at-sample response
- ❖ how to avoid these difficulties in digital control.


Models for Hybrid Control Systems

A hybrid control loop containing both continuous and discrete time elements is shown in Figure 14.1.

We denote the discrete equivalent transfer function of the combination {zero order hold + Continuous Plant + Filter} as $[FG_0G_{h0}]_q$. We have

$$[FG_0G_{h0}]_q = Z \text{ fsampled in pulse response of } F(s)G_0(s)G_{h0}(s)g$$

Figure 14.1: *Sampled data control loop. Block form*

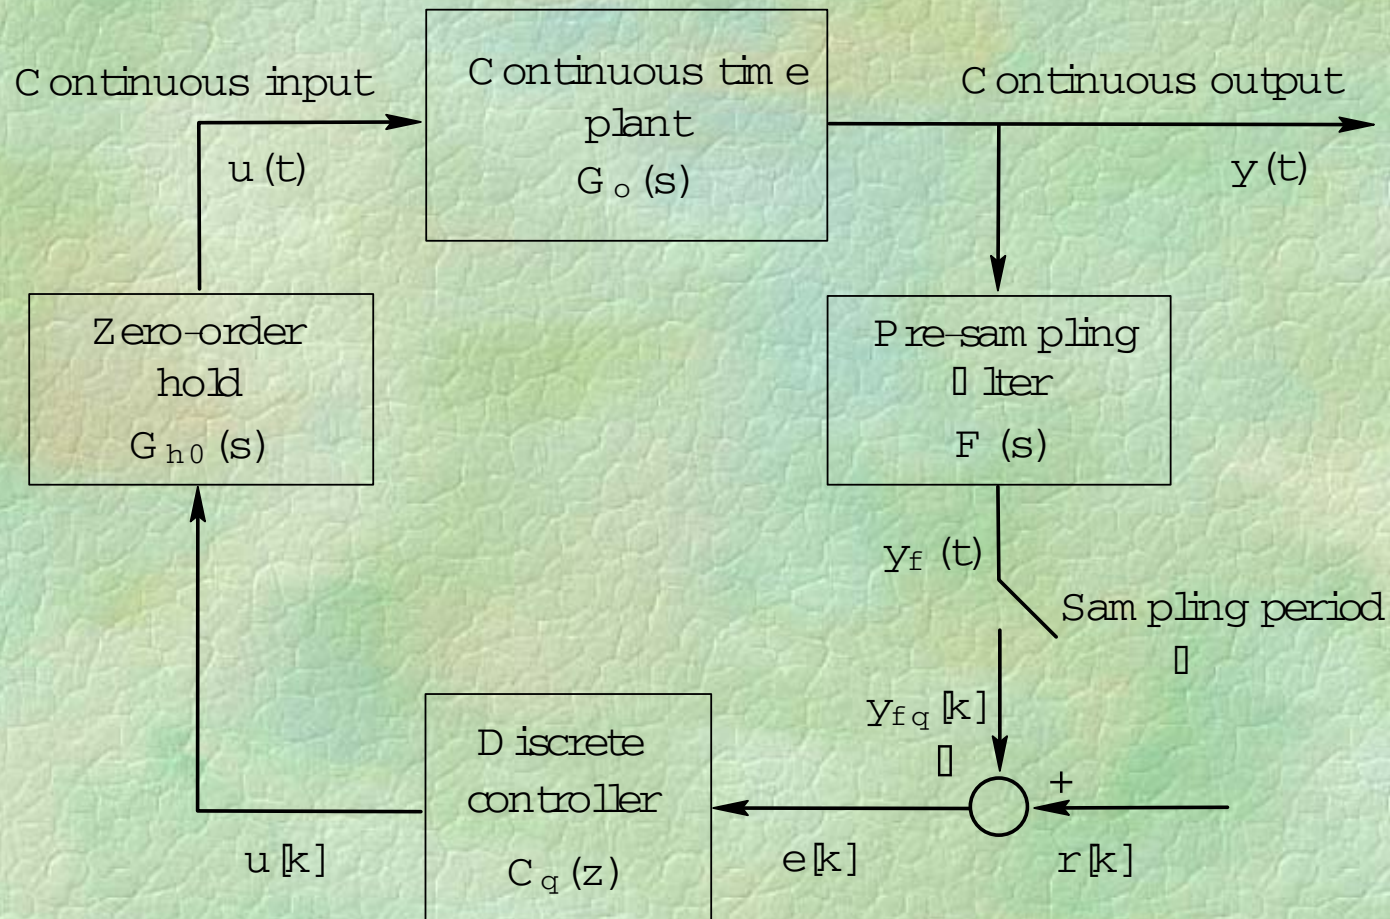

Design Remarks and Recalling (1)

Continuous Time Controller Designs


Tools:

Bode Diagrams


Nichols Charts

Root Locus

Lag Network

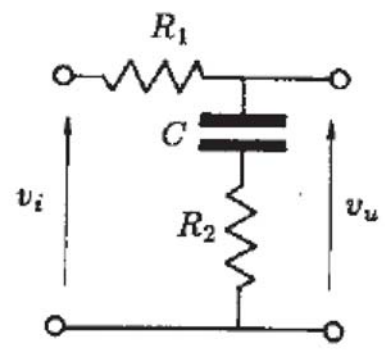


a)

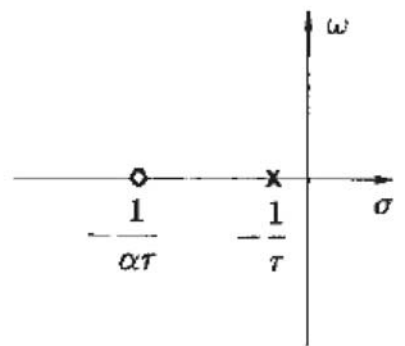


$$G(s) = \frac{R_2 + \frac{1}{Cs}}{R_1 + R_2 + \frac{1}{Cs}} = \frac{1 + R_2 Cs}{1 + (R_1 + R_2) Cs} = \frac{1 + \alpha \tau s}{1 + \tau s}$$

b)

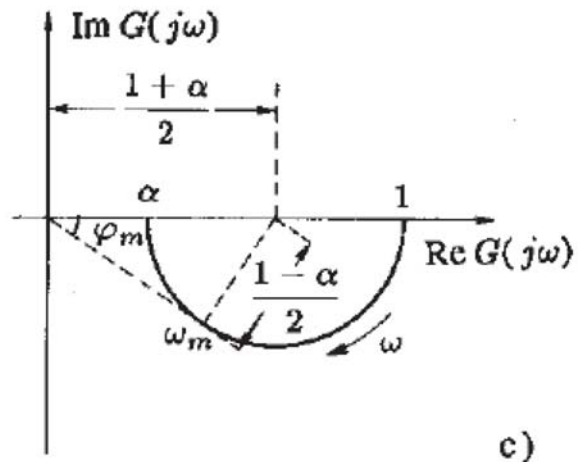



c)

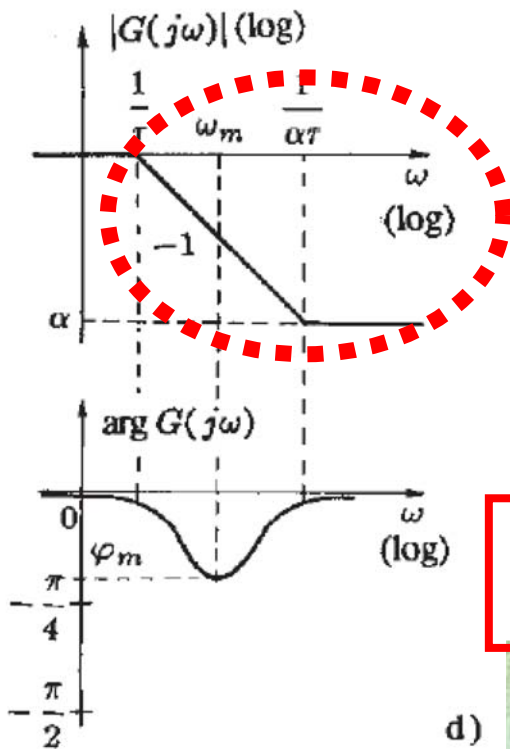





d)

$$\varphi_m = -\arcsin \frac{1 - \alpha}{1 + \alpha}, \quad \omega_m = \frac{1}{\tau \sqrt{\alpha}}$$

Lead Network

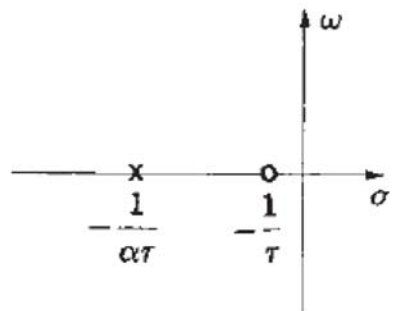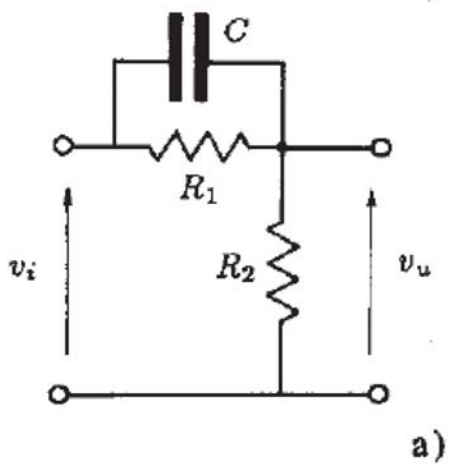

$$G(s) = \frac{R_2}{R_2 + \frac{1}{(1/R_1) + Cs}} = \frac{R_2(1 + R_1Cs)}{R_1 + R_2 + R_1R_2Cs} = \alpha \frac{1 + \tau s}{1 + \alpha\tau s}$$

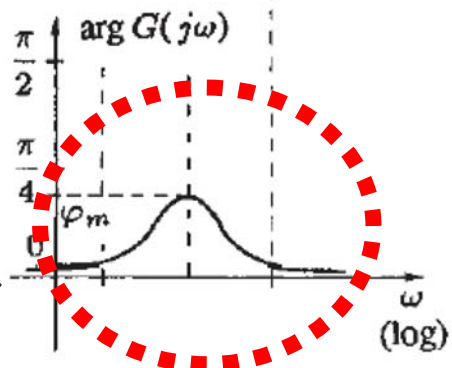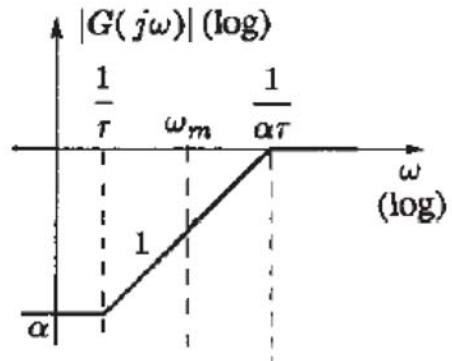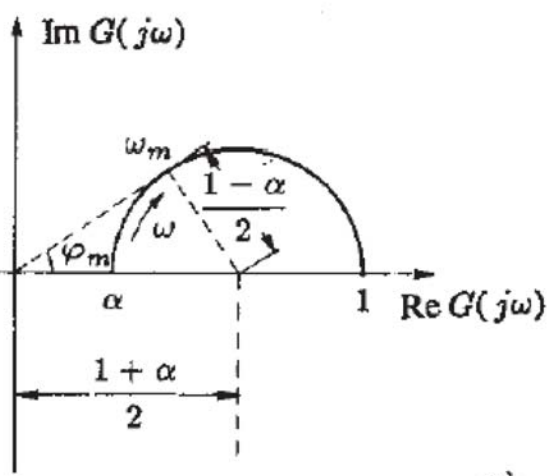


$$\omega_m = \frac{1}{\tau\sqrt{\alpha}}$$


$$\varphi_m = \arcsen \frac{1 - \alpha}{1 + \alpha}$$

d)

Proportional Controller

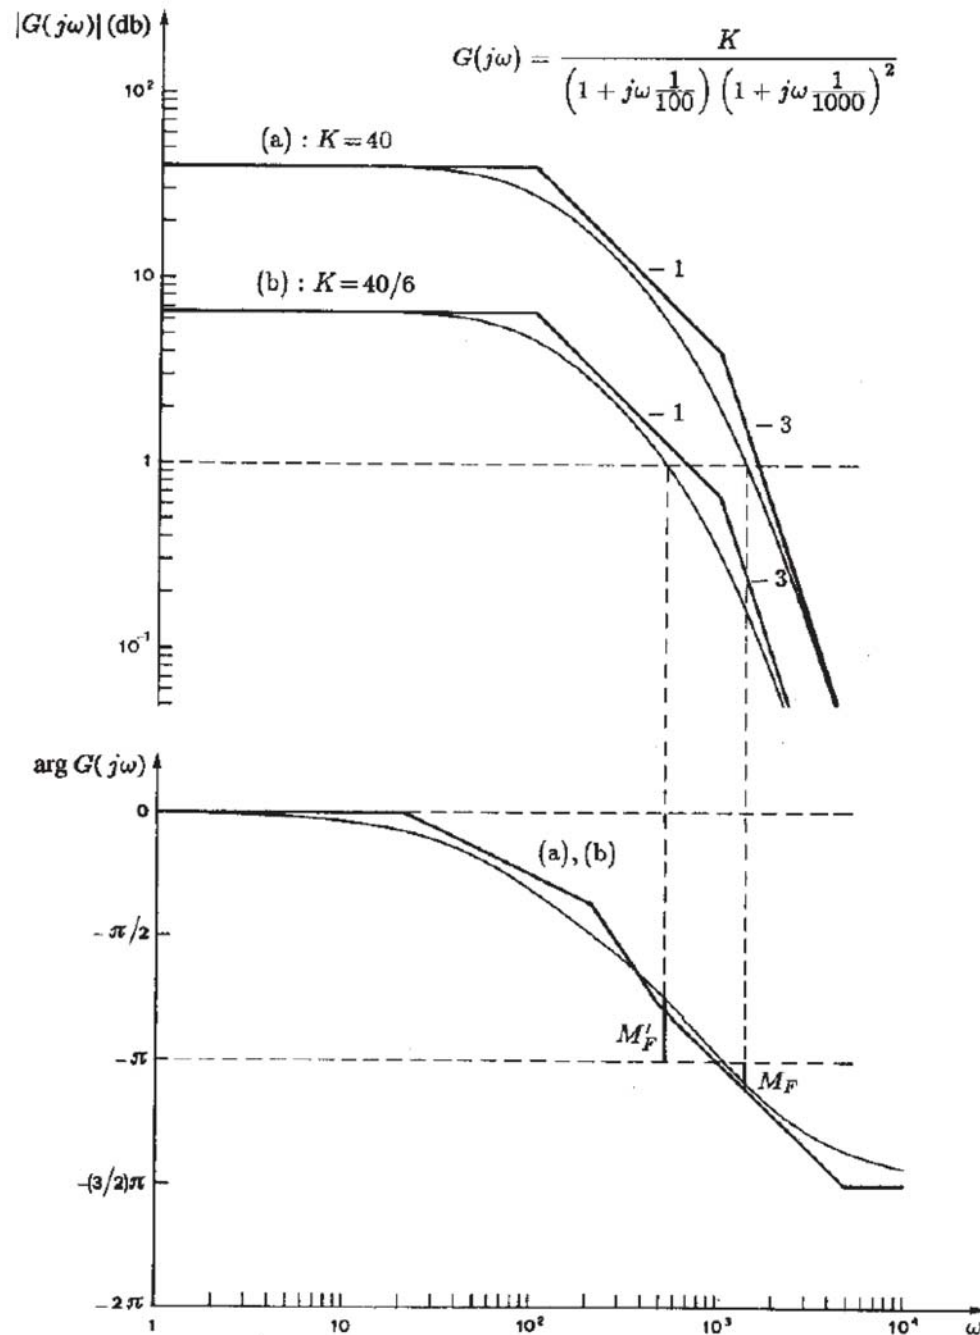

Lag network controller

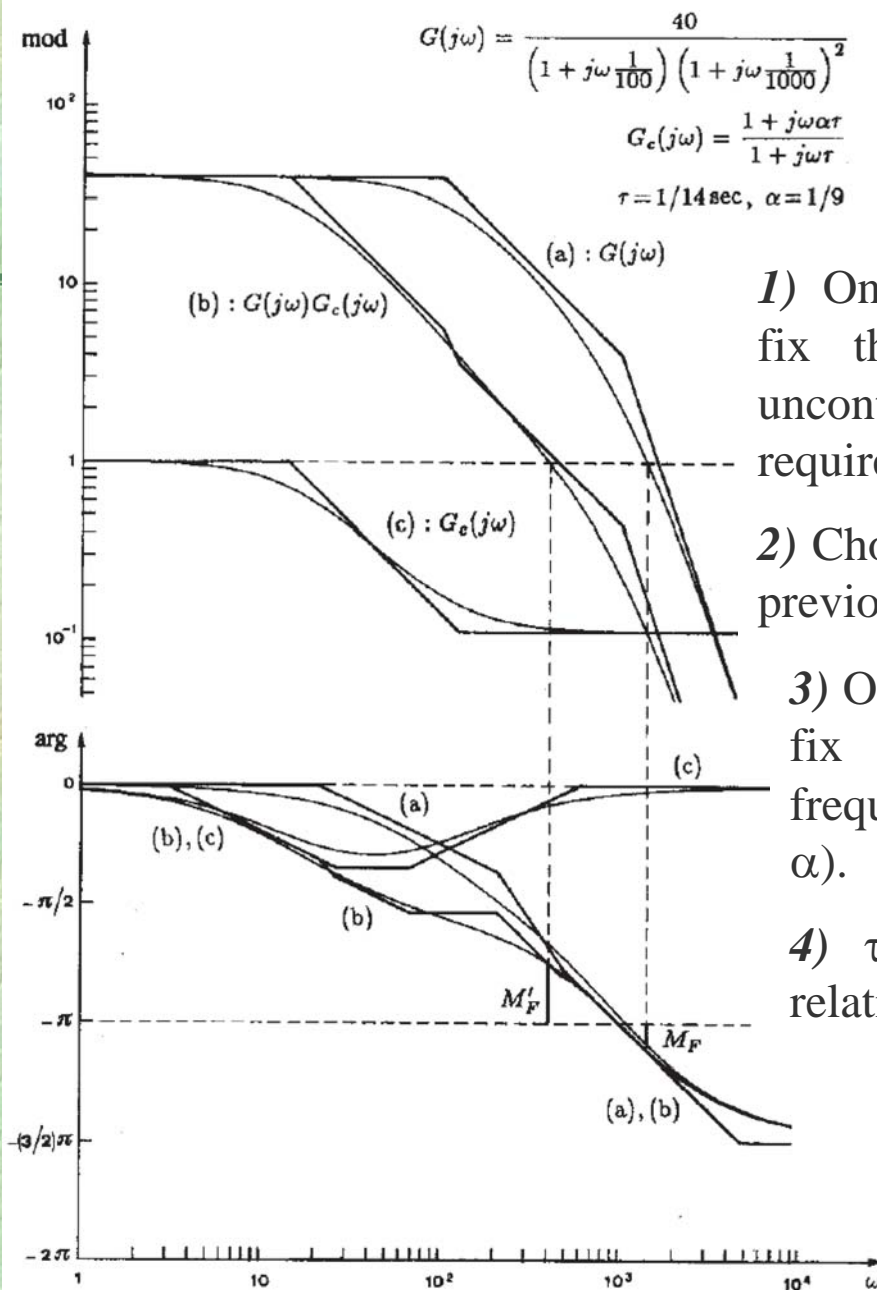

1) On the Bode phase diagram fix the frequency where the uncontrolled system has the required M_f .


2) Choose ω^* 20% less than the previous fixed frequency.

3) On the Bode magnitude plot fix the attenuation at the frequency ω^* (i.e. the value of α).

4) τ is computed by the relation:

$$\frac{1}{\alpha \tau} = \frac{\omega^*}{10}$$

Lead controller

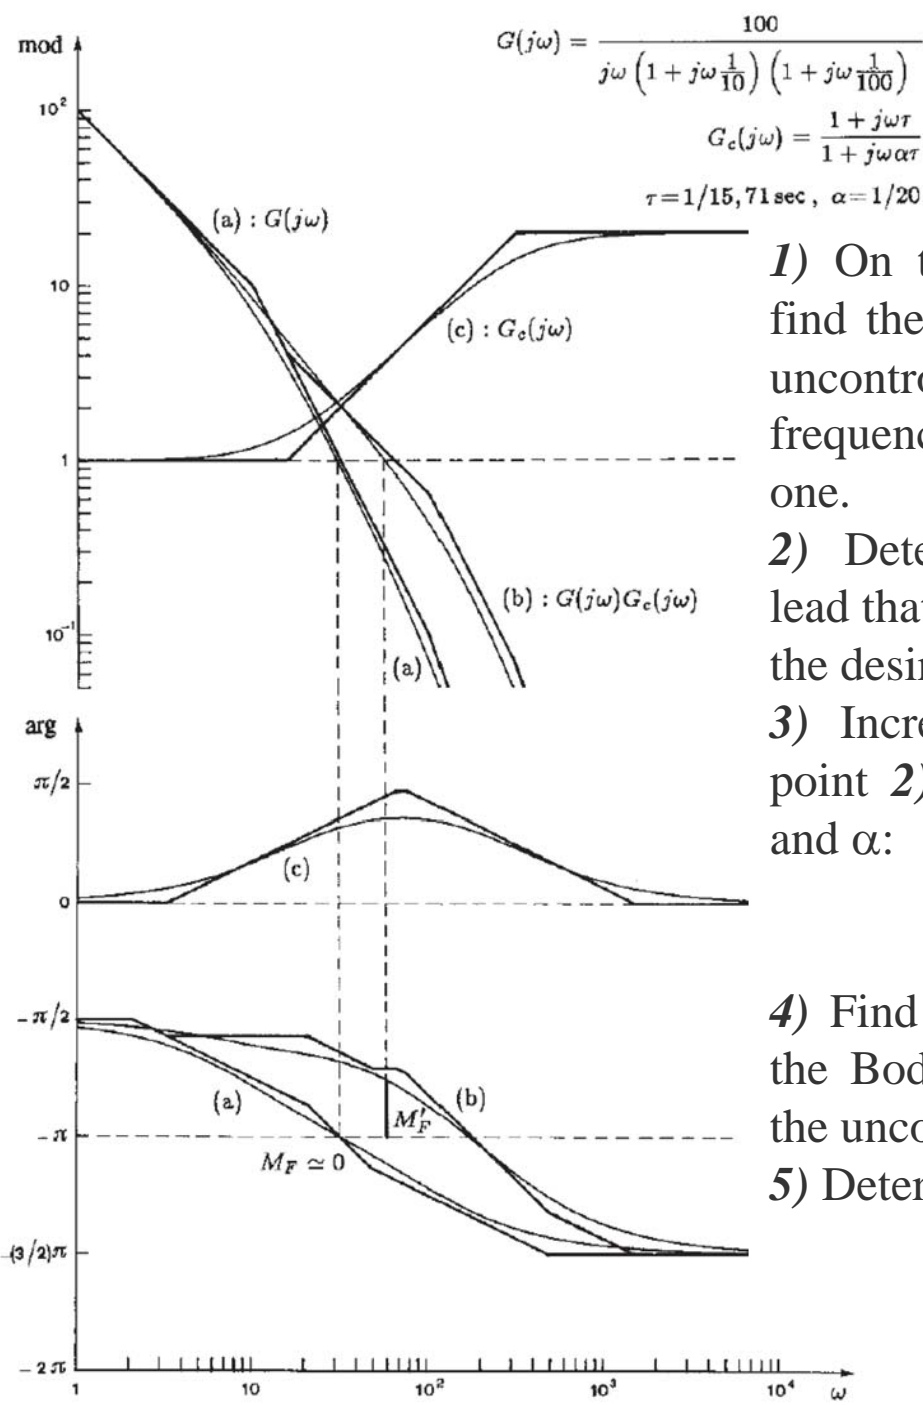

1) On the Bode phase diagram find the phase margin M_f of the uncontrolled system and the ω^* frequency where its magnitude is one.

2) Determine the basic phase lead that is required for achieving the desired M_f .

3) Increase the value fixed at point 2) and thus determine ϕ_m and α :



$$\alpha = \frac{1 - \sin(\phi_m)}{1 + \sin(\phi_m)}$$

4) Find the frequency ω^* where the Bode magnitude diagram of the uncontrolled model is $\alpha/2$.


5) Determine τ from the relation:

$$\omega^* = \frac{1}{\tau\sqrt{\alpha}}$$

Example: Root Locus

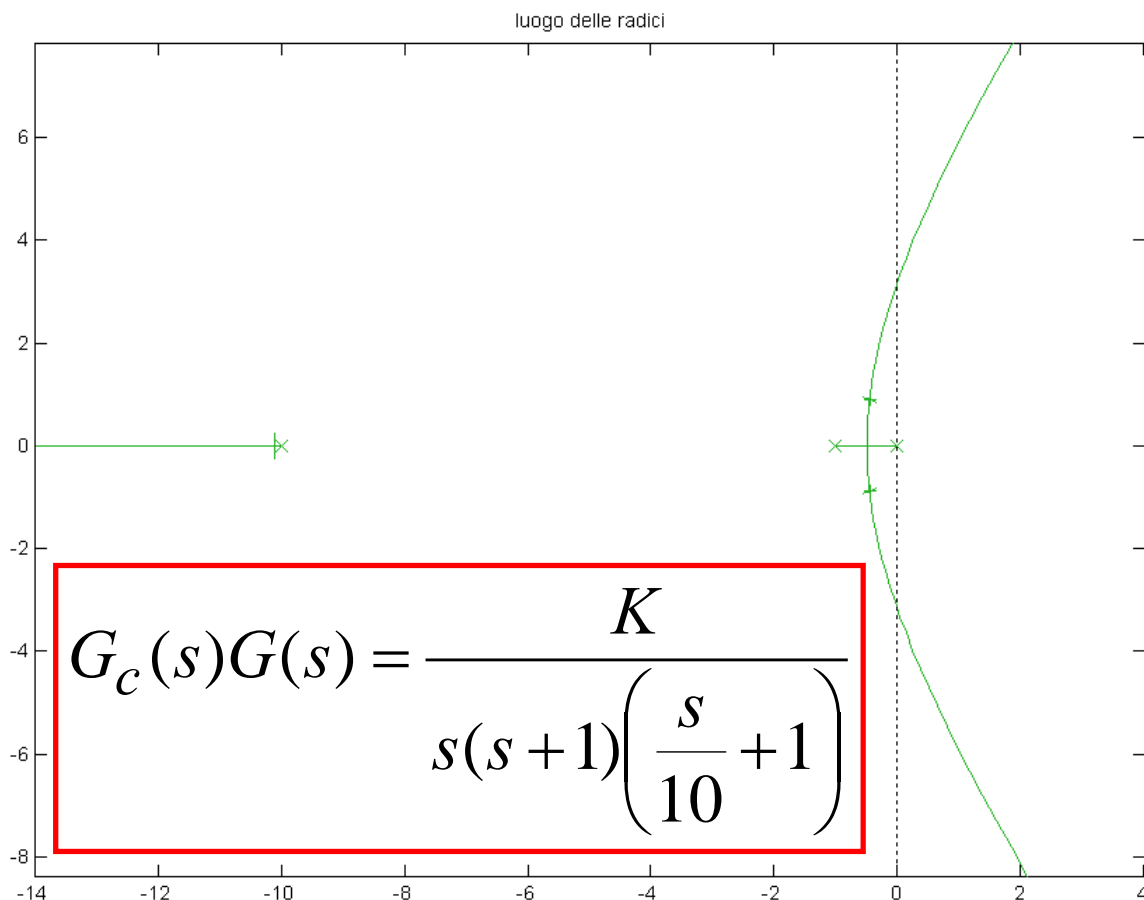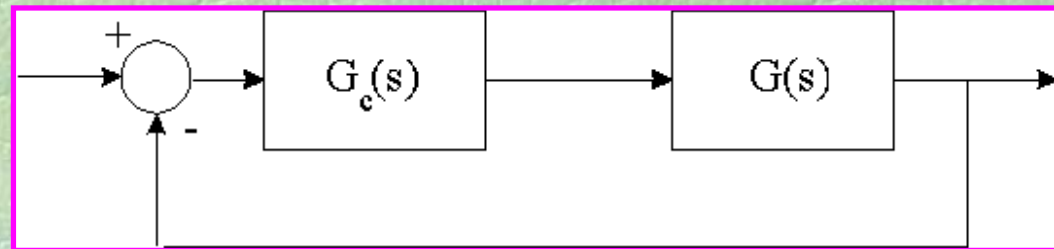



Root locus & δ -constant loci

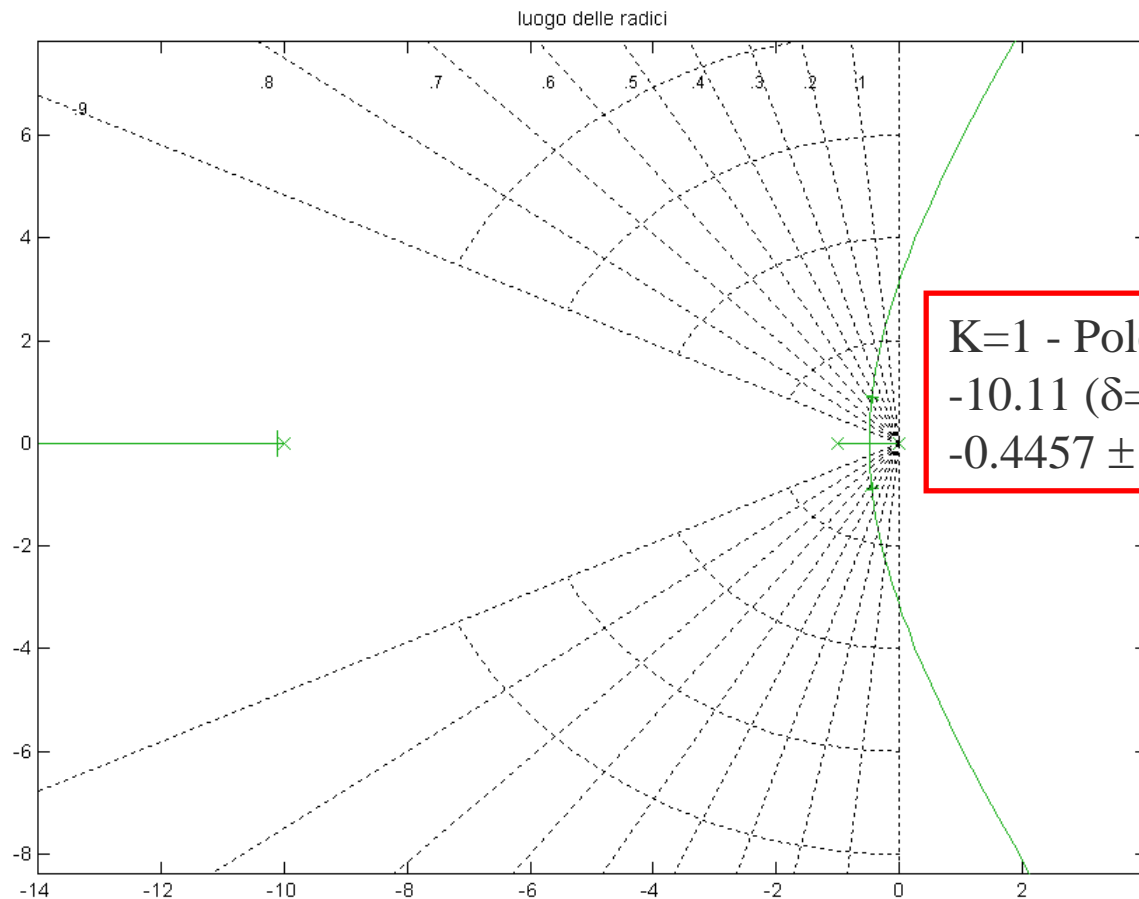

K=1 - Poles:
-10.11 ($\delta=1$)
 $-0.4457 \pm 0.8892 i$ ($\delta=0.44$)


Step Response

Example: Indices

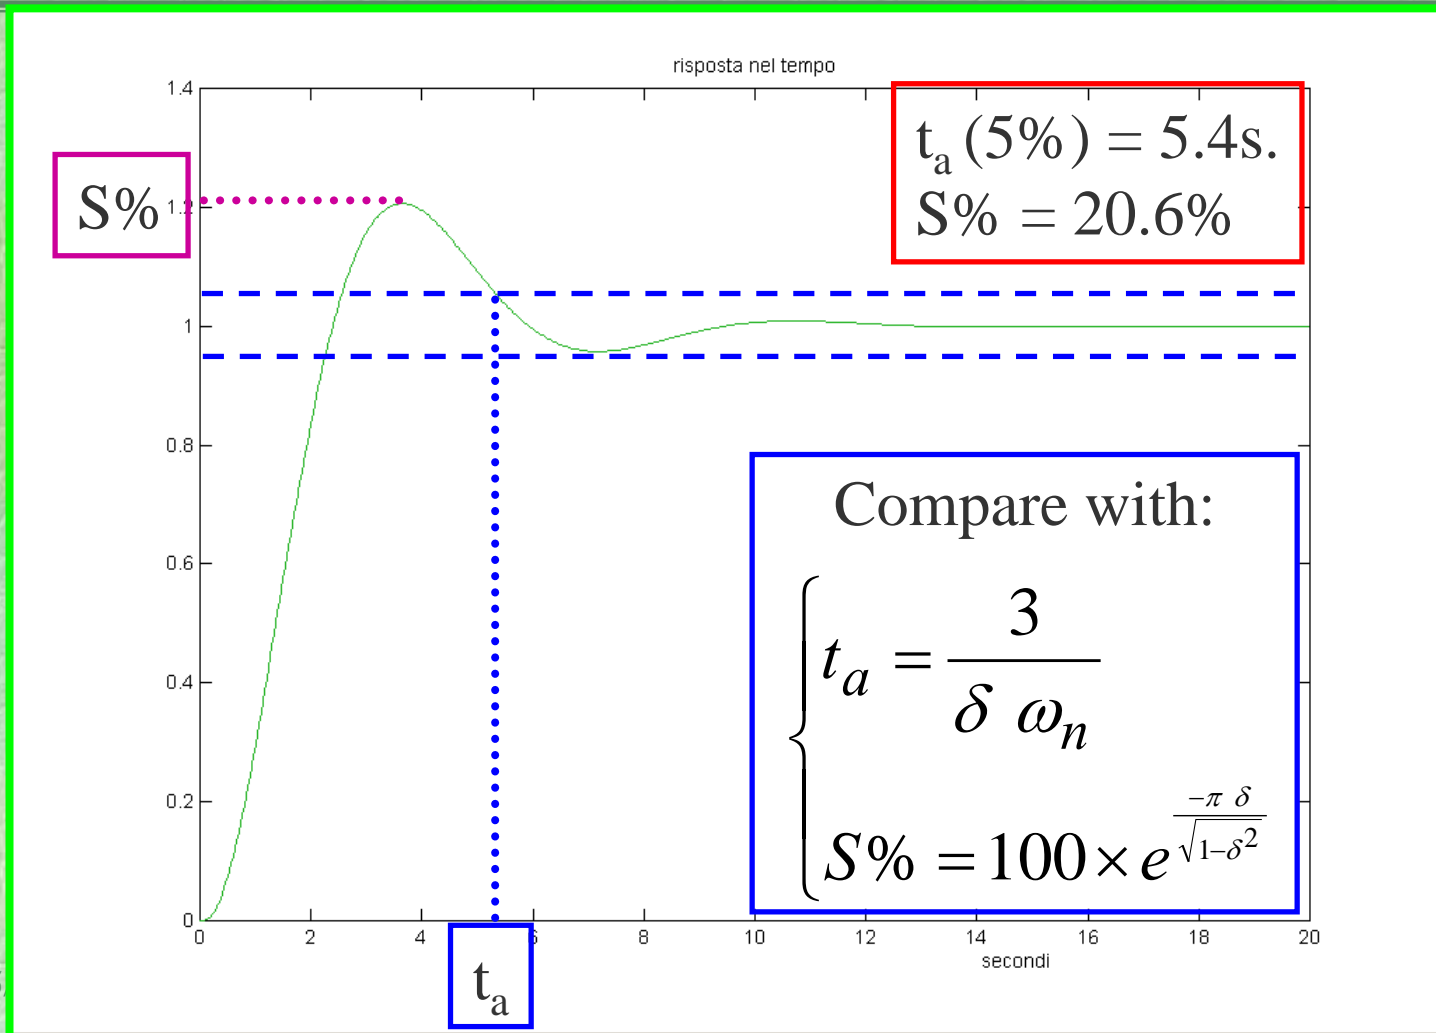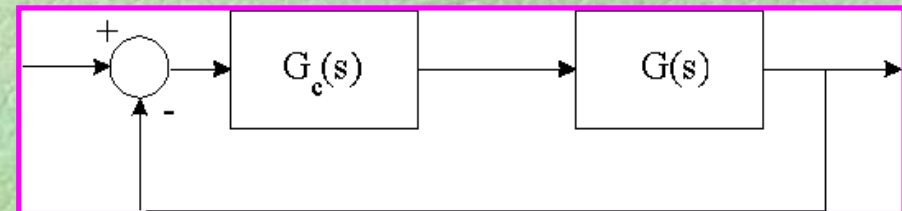

Design Remarks and Recalling (2)


Link between z and s planes (1)

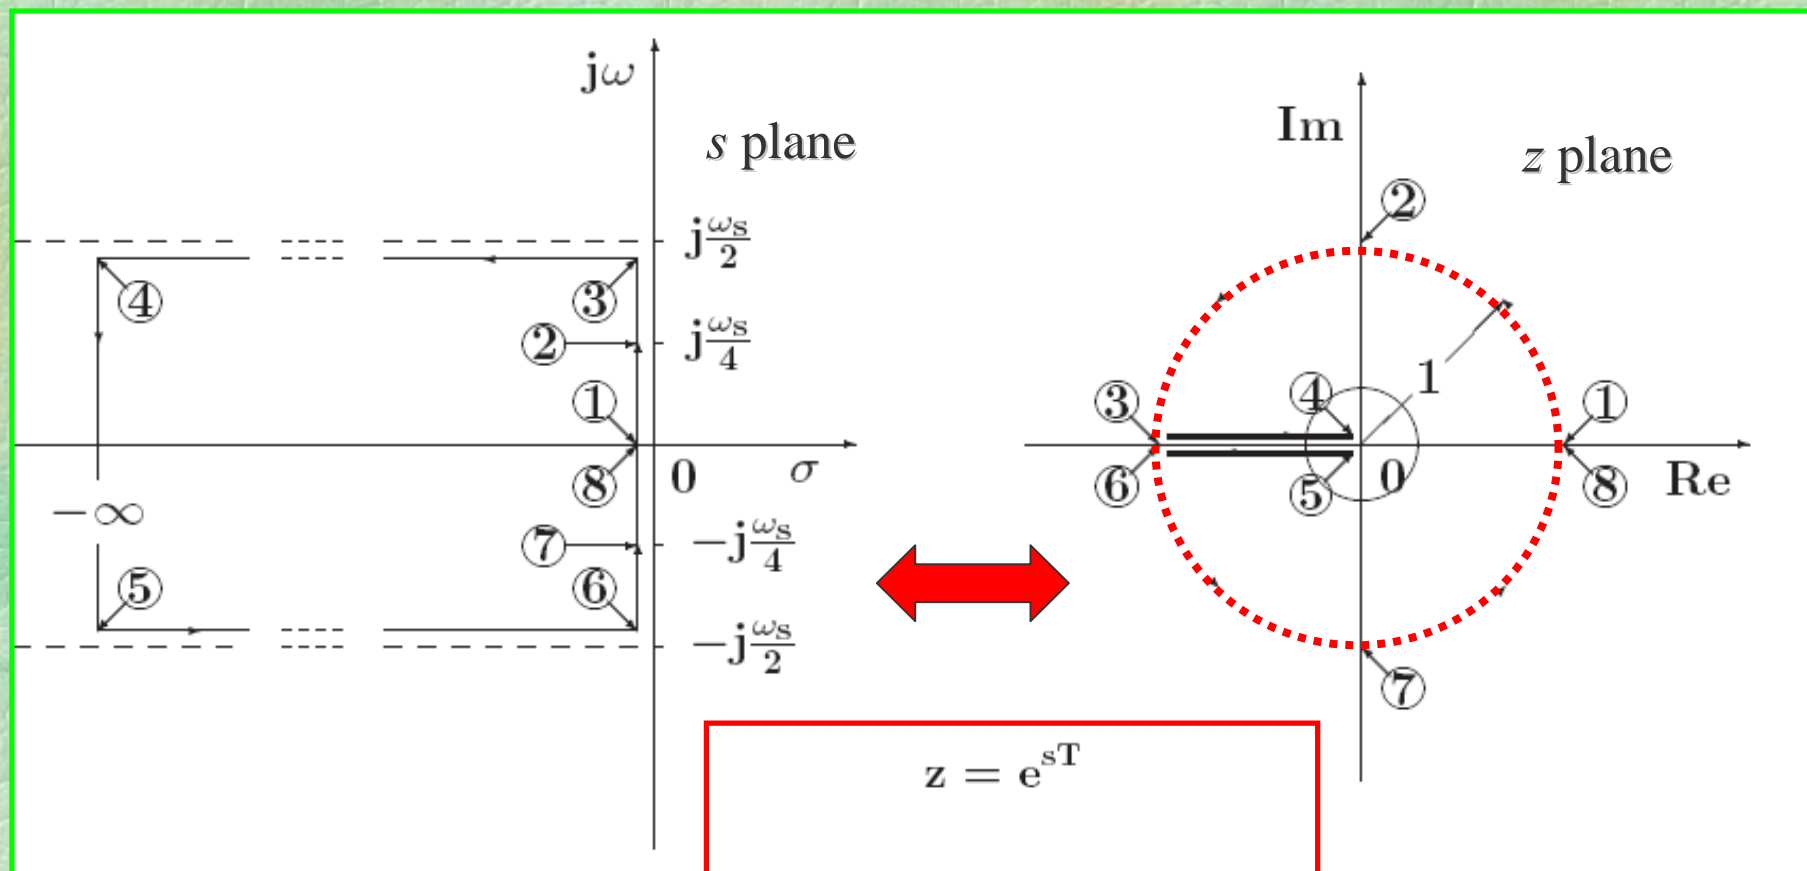

$$z = e^{sT}$$

$$z = e^{T(\sigma + j\omega)} = e^{T\sigma} e^{jT\omega}$$


Link between z and s planes (2)

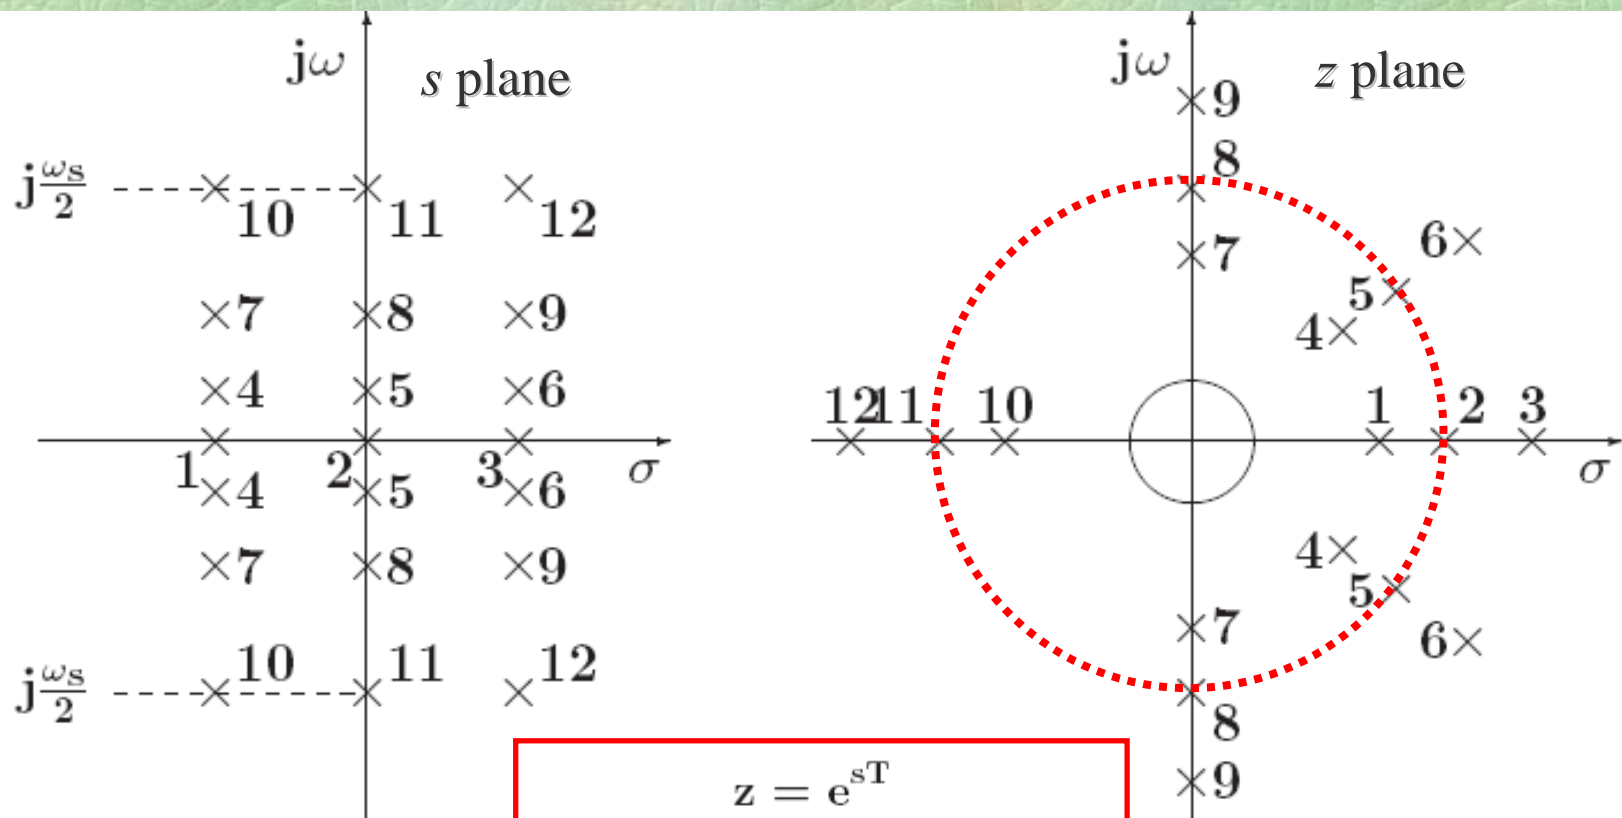


$$z = e^{sT}$$

$$z = e^{T(\sigma + j\omega)} = e^{T\sigma} e^{jT\omega}$$



Discrete Model Stability

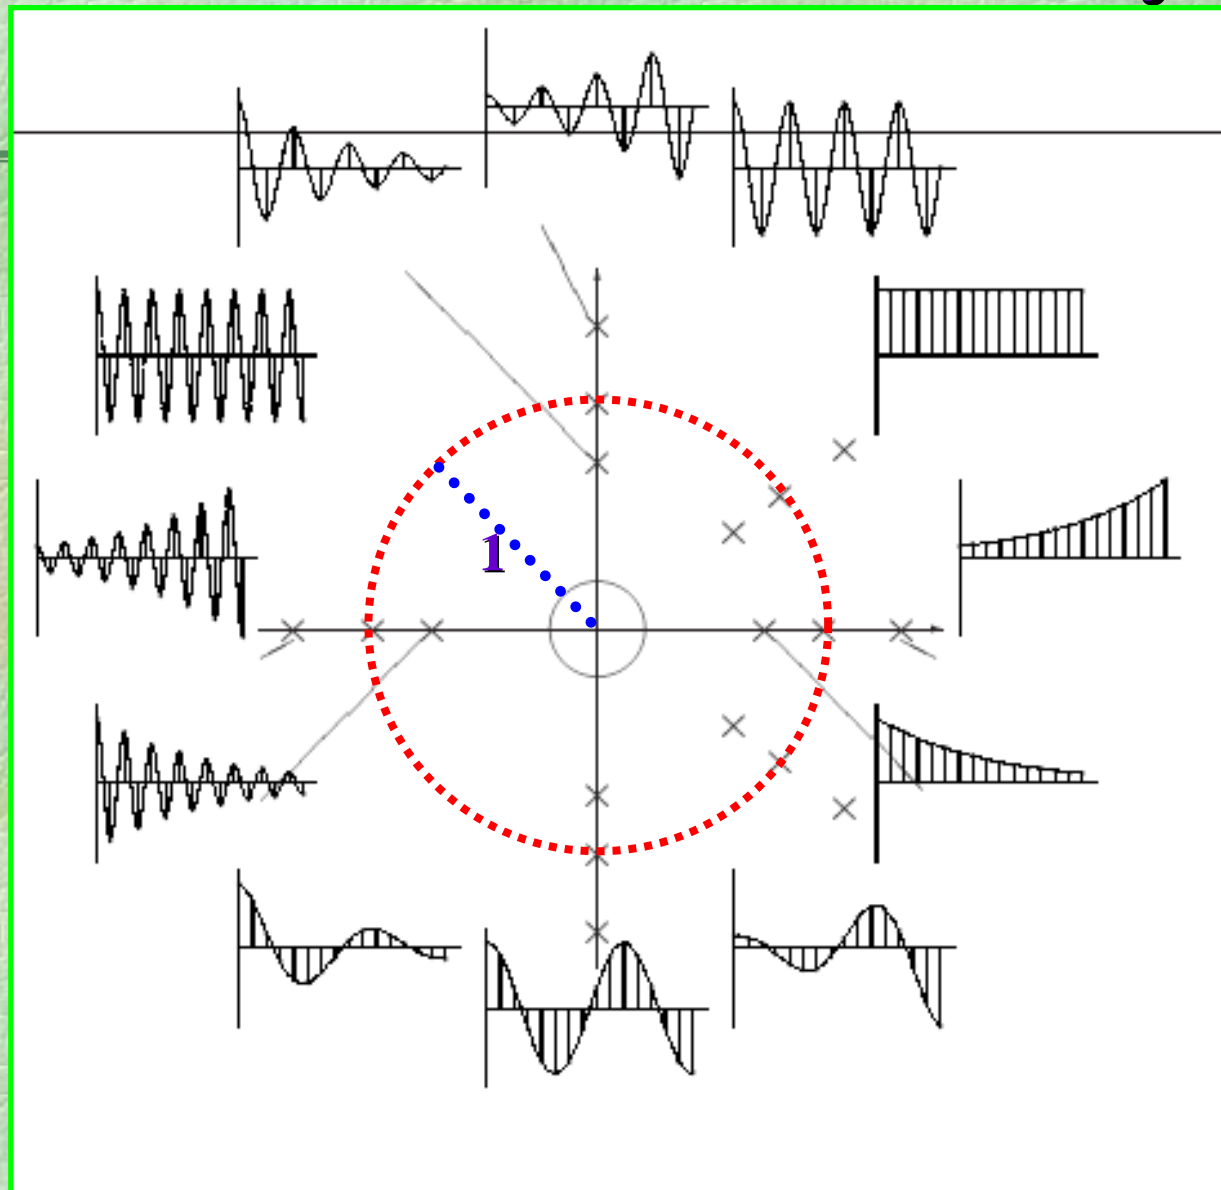

Design Strategy Overview

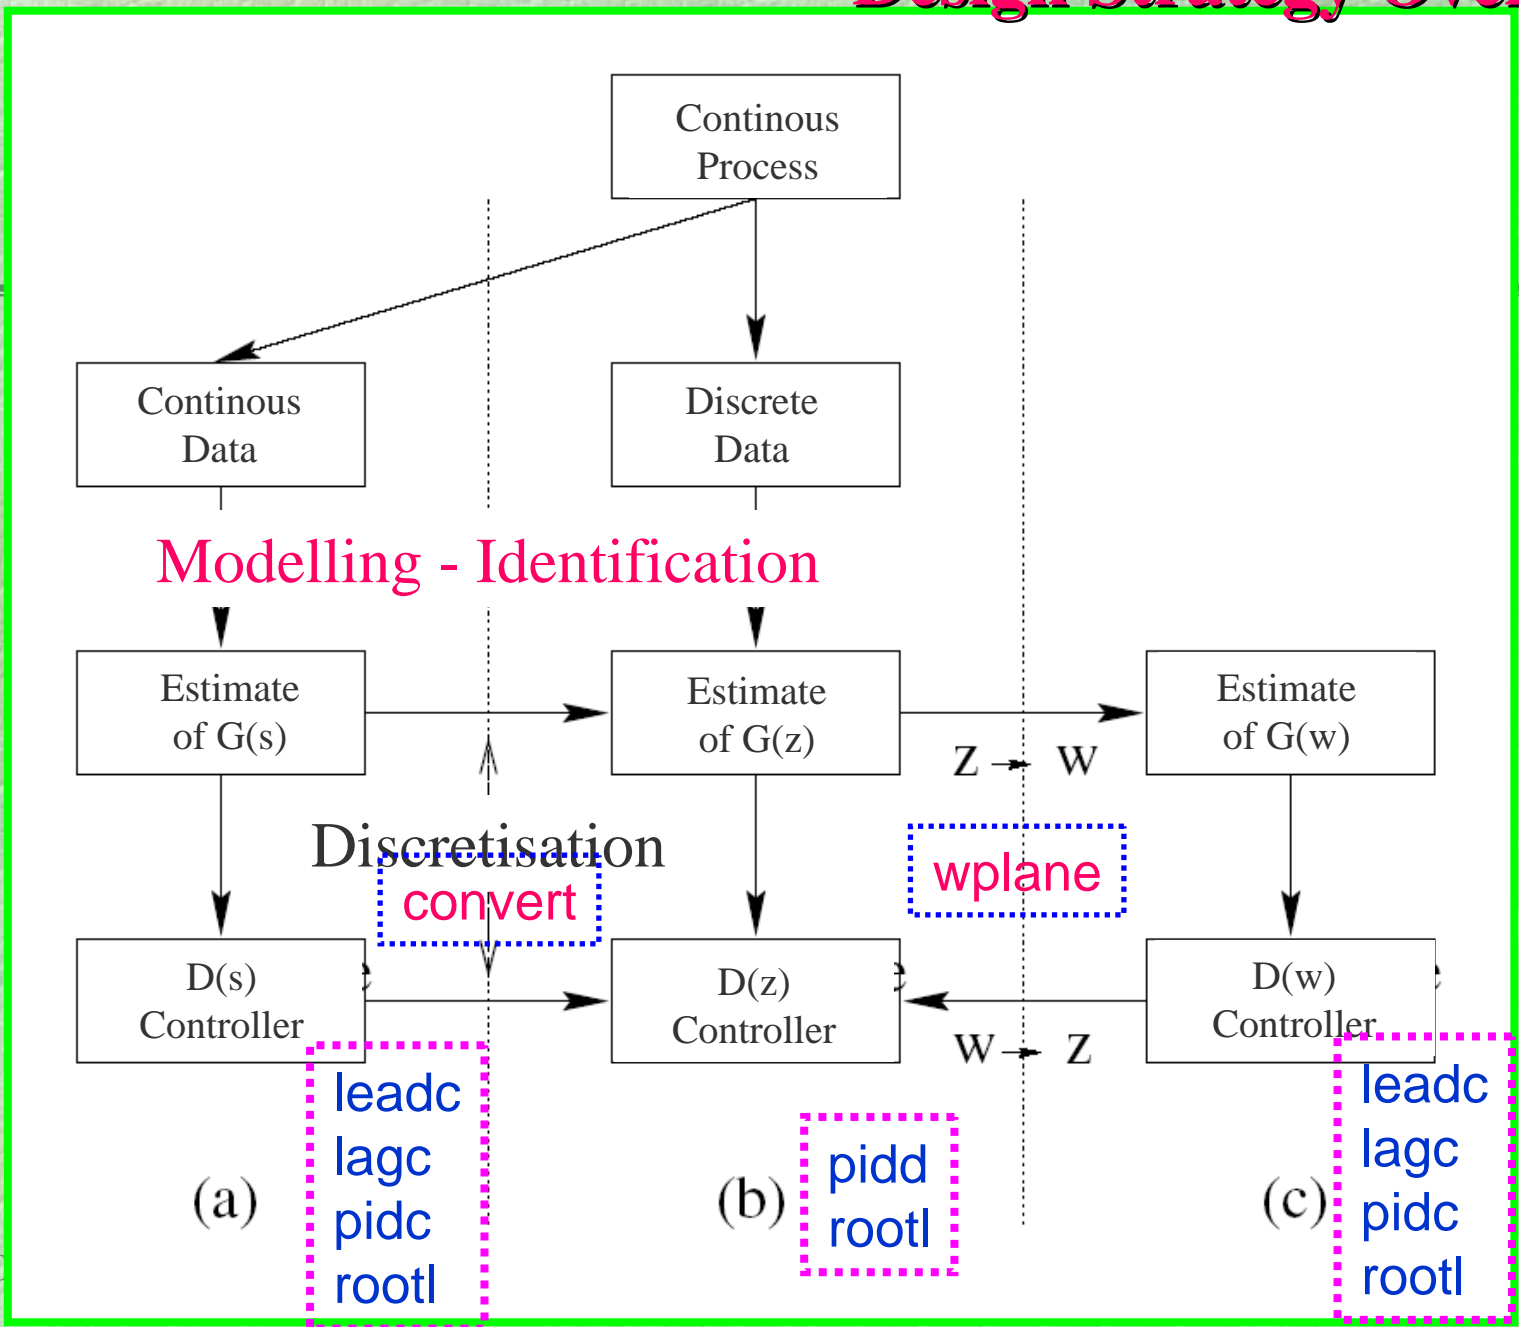

2nd order system Step Response (1)

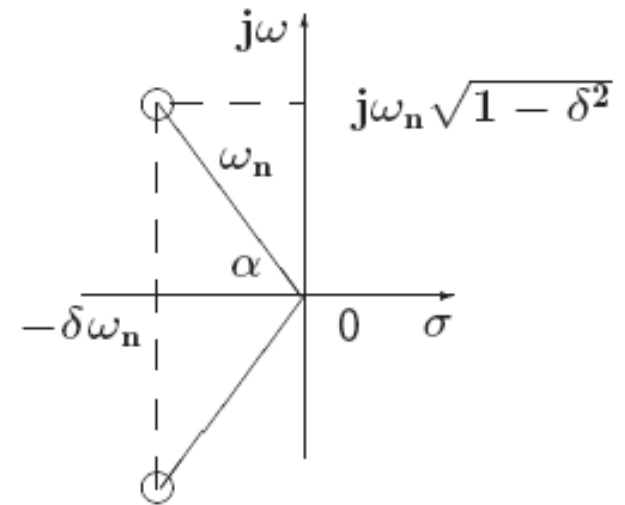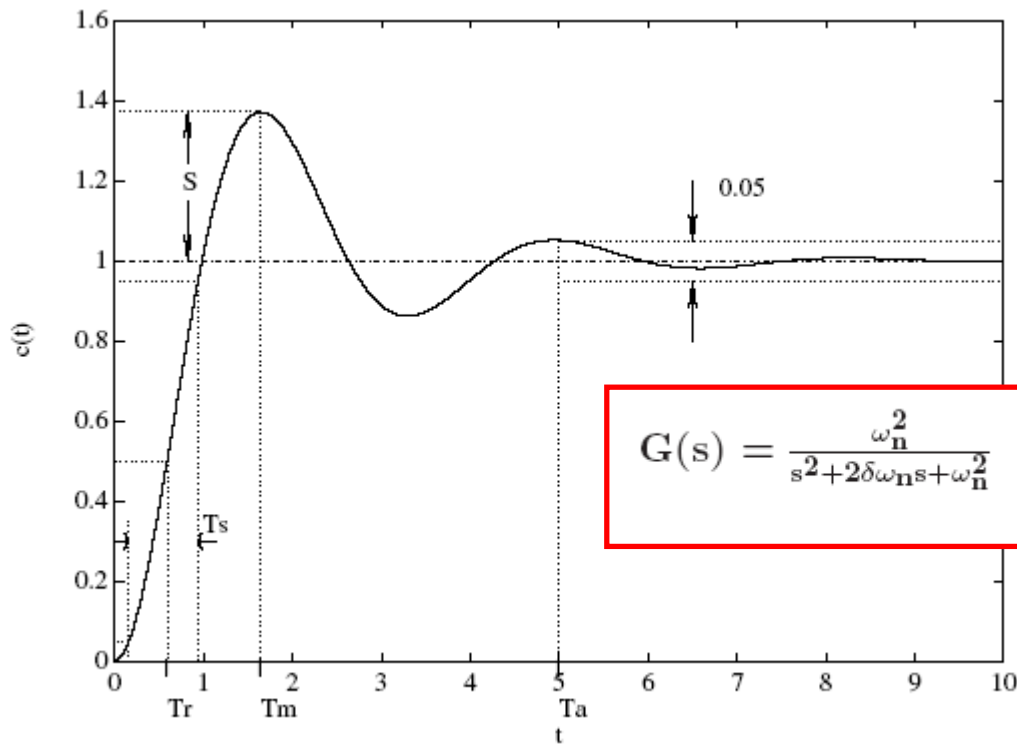


(1)

$$t_a = \frac{3}{\delta \omega_n}$$


Settling Time

2nd order system Step Response (2)

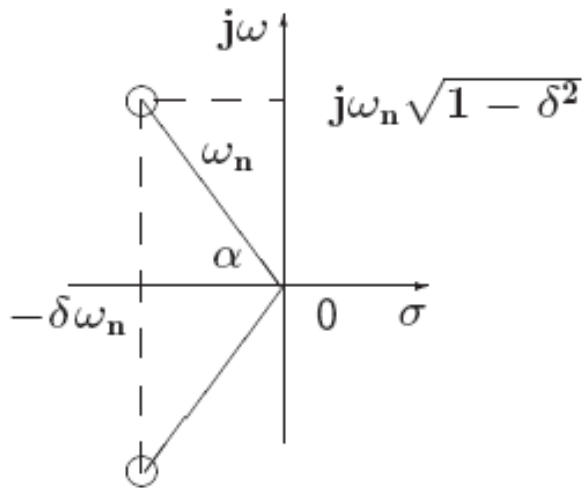


Overshoot

$$G(s) = \frac{\omega_n^2}{s^2 + 2\delta\omega_n s + \omega_n^2}$$

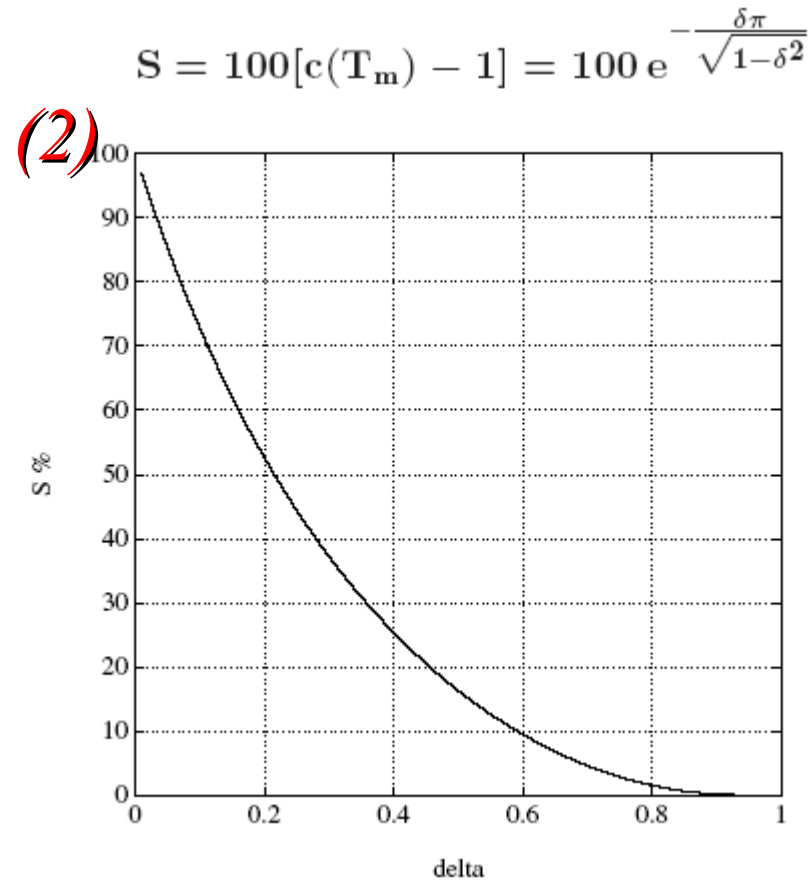

Plane s & Plane z Mapping

$$S = 100[c(T_m) - 1] = 100 e^{-\frac{\delta\pi}{\sqrt{1-\delta^2}}}$$

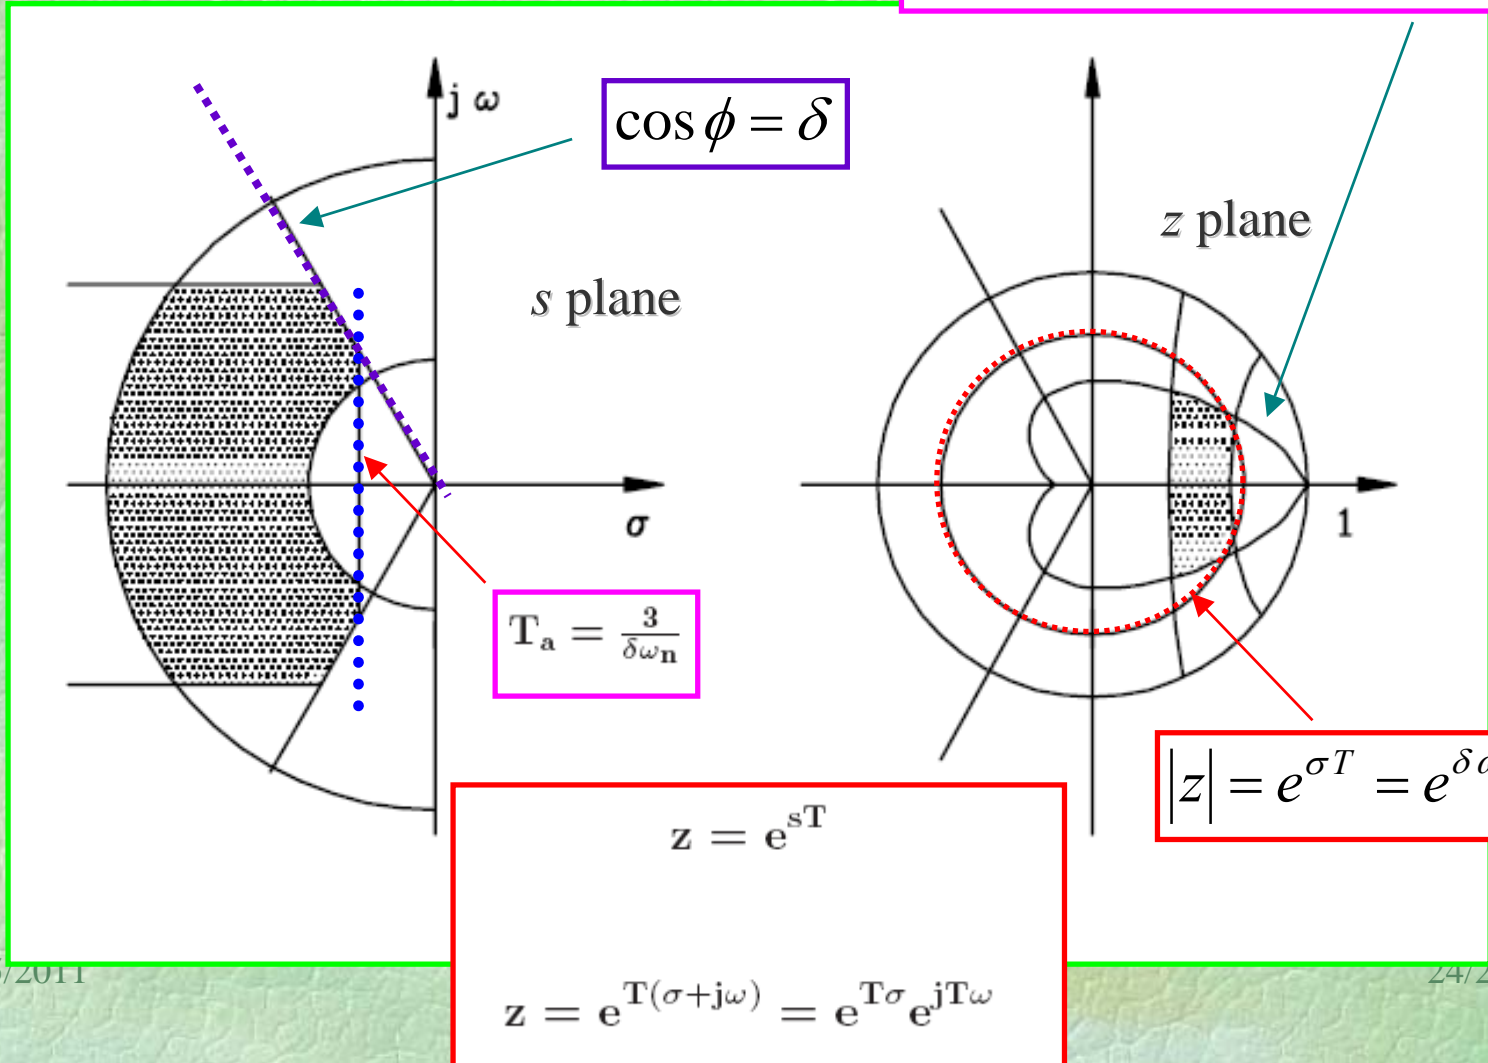

Frequency Response

z -plane \leftrightarrow w -plane

$$G(z) \quad z = e^{j\omega T} \rightarrow G(e^{j\omega T}).$$

(??? Non rational transfer function...)


$$w = \frac{2}{T} \frac{z - 1}{z + 1} \quad z = \frac{1 + w \frac{T}{2}}{1 - w \frac{T}{2}}.$$

Recall:

$$z = e^{sT} \Big|_{s=j\omega} = e^{j\omega T} = \frac{e^{j\omega \frac{T}{2}}}{e^{-j\omega \frac{T}{2}}} \cong \frac{1 + j\omega \frac{T}{2}}{1 - j\omega \frac{T}{2}}$$

Zero Order Hold Effects...

Figure 14.2: Connections between $y_f(t)$, $y_f[k]$ and $\hat{y}_f(t)$ for $y_f(t) = \sin(2\pi t)$, $\Delta=0.1$

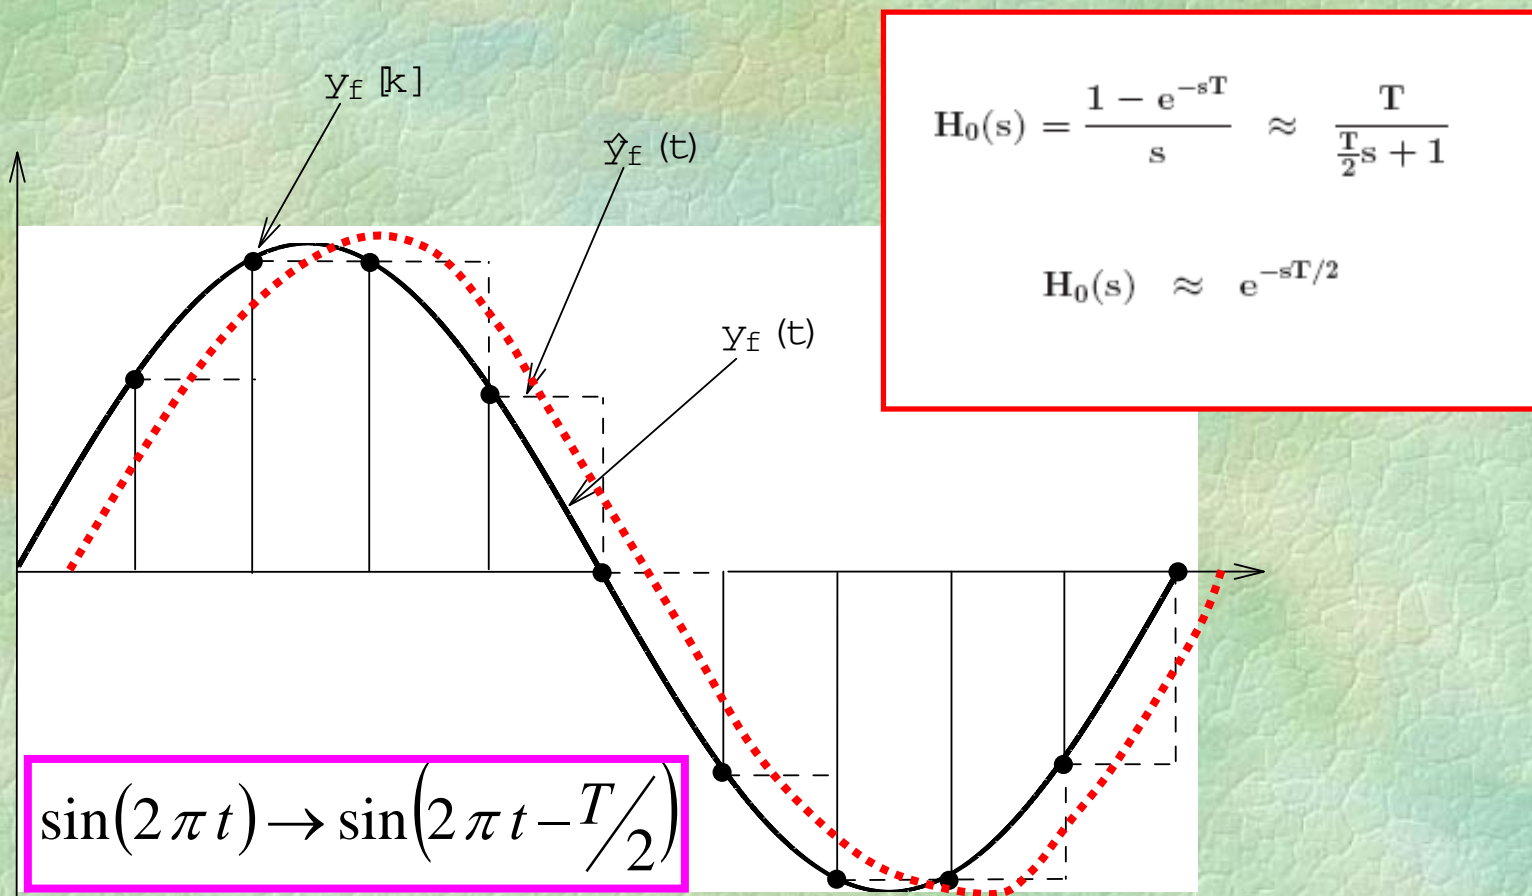


Phase Margin Degradation!

$$H_0(s) = \frac{1 - e^{-sT}}{s} \approx \frac{T}{\frac{T}{2}s + 1}$$

$$H_0(s) \approx e^{-sT/2}$$

$$M_f^{(h_0)} \cong M_f - T/2 \quad !!!$$

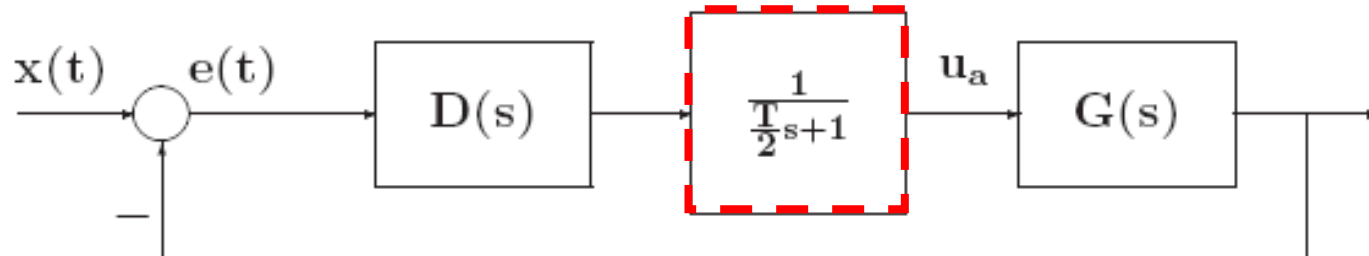

Discretisation Techniques...

$$D(z) = D(s) \Big|_{s = \frac{z-1}{T}} \quad \text{Euler (forward)}$$

$$D(z) = D(s) \Big|_{s = \frac{1-z^{-1}}{T} = \frac{z-1}{Tz}} \quad \text{Euler (backward)}$$

$$D(z) = \mathcal{Z} \left[\mathcal{L}^{-1} [D(s)] \right]$$

Sampled Impulse Response Discretisation

$$D(z) = (1 - z^{-1}) \mathcal{Z} \left[\frac{D(s)}{s} \right] = \mathcal{Z} \left[\frac{1 - e^{-sT}}{s} D(s) \right]$$

Summary

- ❖ **Hybrid analysis** allows one to mix continuous and discrete time systems properly.
- ❖ **Hybrid analysis** should always be utilized when design specifications are particularly stringent and one is trying to push the limits of the fundamentally achievable.